

Tensile Force Monitoring on Large Winch-Assist Forwarders Operating in British Columbia

Omar Mologni, Peter Dyson, Dzhamal Amishev, Andrea Rosario Proto, Giuseppe Zimbalatti, Raffaele Cavalli, Stefano Grigolato

Abstract

The forest industry around the world is facing common challenges in accessing wood fiber on steep terrain. Fully mechanized harvesting systems based on specialized machines, such as winch-assist forwarders, have been specifically developed for improving the harvesting performances in steep grounds. While the mechanization process is recognized as a safety benefit, the use of cables for supporting the machine traction needs a proper investigation. Only a few studies have analyzed the cable tensile forces of winch-assist forwarders during real operations, and none of them focused on large machines normally used in North America. Consequently, a preliminary study focused on tensile force analysis of large winch-assist forwarders was conducted in three sites in the interior of British Columbia during the fall of 2017.

The results report that in 86% of the cycles, the maximum working load of the cable was less than one-third of the minimum breaking load. The tensile force analysis showed an expected pattern of minimum tensile forces while the forwarders were traveling or unloading on the road site and high tensile forces when operating on steep trails, loading or traveling. Further analysis found that the maximum cycle tensile forces occurred most frequently when the machines were moving uphill, independently of whether they were empty or loaded. While the forwarders were operating on the trails, slope, travel direction, and distance of the machines from the anchor resulted statistically significant and able to account for 49% of tensile force variability. However, in the same conditions, the operator settings accounted for 77% of the tensile force variability, suggesting the human factor as the main variable in cable tensile force behavior during winch-assist operations.

Keywords: Steep slope harvesting, ground-based extraction, cut-to-length system, cable tensile force, winch-assist

1. Introduction

Robust and sound forest engineering practices specifically developed for different terrain and stand characteristics are a crucial element of sustainable forest management systems; such practices must be technically feasible, economically viable, environmentally sound and socially acceptable (Heinimann 2004, Marchi et al. 2018). The forest industry around the world is facing common challenges in accessing wood fiber on steep terrain (Visser and Stampfer 2015, Mologni et al. 2016). Steeper slopes require motor-manual felling and yarding with systems such as cable (Cavalli 2012,

Visser and Harril 2017) and helicopter (Lyons and McNeel 2004, Grigolato et al. 2016), but these options are more expensive and much more hazardous compared to fully mechanized ground-based harvesting operations (Hert 2016).

Specialized forestry machines can often exceed the upper slope limits established in safety codes in many countries throughout the world (Alam et al. 2013, Visser and Berkett 2015, Session et al. 2017). Current regulations in the province of British Columbia (Canada), for example, restrict the use of ground-based logging equipment to slopes not exceeding 40% (B.C. Reg.

296/97) following specific steep slope protocols for stability and safety concerns. The slope is not the only limiting factor, however, and fully mechanized ground-based systems are often limited by other terrain factors, such as soil strength and/or roughness (Amishev et al. 2009).

There is a considerable interest and recent worldwide effort to improve traction of forestry machines when operating on steep slopes, especially in western North America (Amishev 2016). Various steep-slope harvesting machines with specialized undercarriages and carriers have been shown to safely access and operate on terrain up to 70% slope without external support or anchoring (Cavalli 2015). However, there is a limit about the physical feasibility of operating machines on steep slopes (Berkett 2012) that needs to be better defined and understood. A way to increase traction and stability on steep terrain is through assisting forestry machines by winch and cable to various anchor types. Options for extending mechanized forestry operations to steep slopes were examined during the 1970s through a feasibility study of a self-contained

cable tether system (McKenzie and Richardson 1978). Steep terrain winch-assist machinery for forestry have been commercially available in Europe since the 1990s and since the early 2000s numerous commercial options have been developed for harvesters (Visser and Stampfer 2015). In New Zealand, the first winch-assist system was pioneered in 2006, while in North America, the first winch-assist unit was designed and manufactured in 2012.

The subsequent developments in purpose-built winch-assist machines over the last decade have led to the application of this concept as a well defined harvesting system (Cavalli and Amishev 2017) with potentiality for improving the efficiency of harvesting operations (Dyson and Boswell 2016), as well as for improving machine mobility and reducing soil disturbance through the reduction of slip (Visser and Stampfer 2015). However, even if scientific and anecdotal evidence provided for increased knowledge and understanding, there is still a limited quantitative framework with which to evaluate the relationship between cable tensile force, stability, ground pressures, and

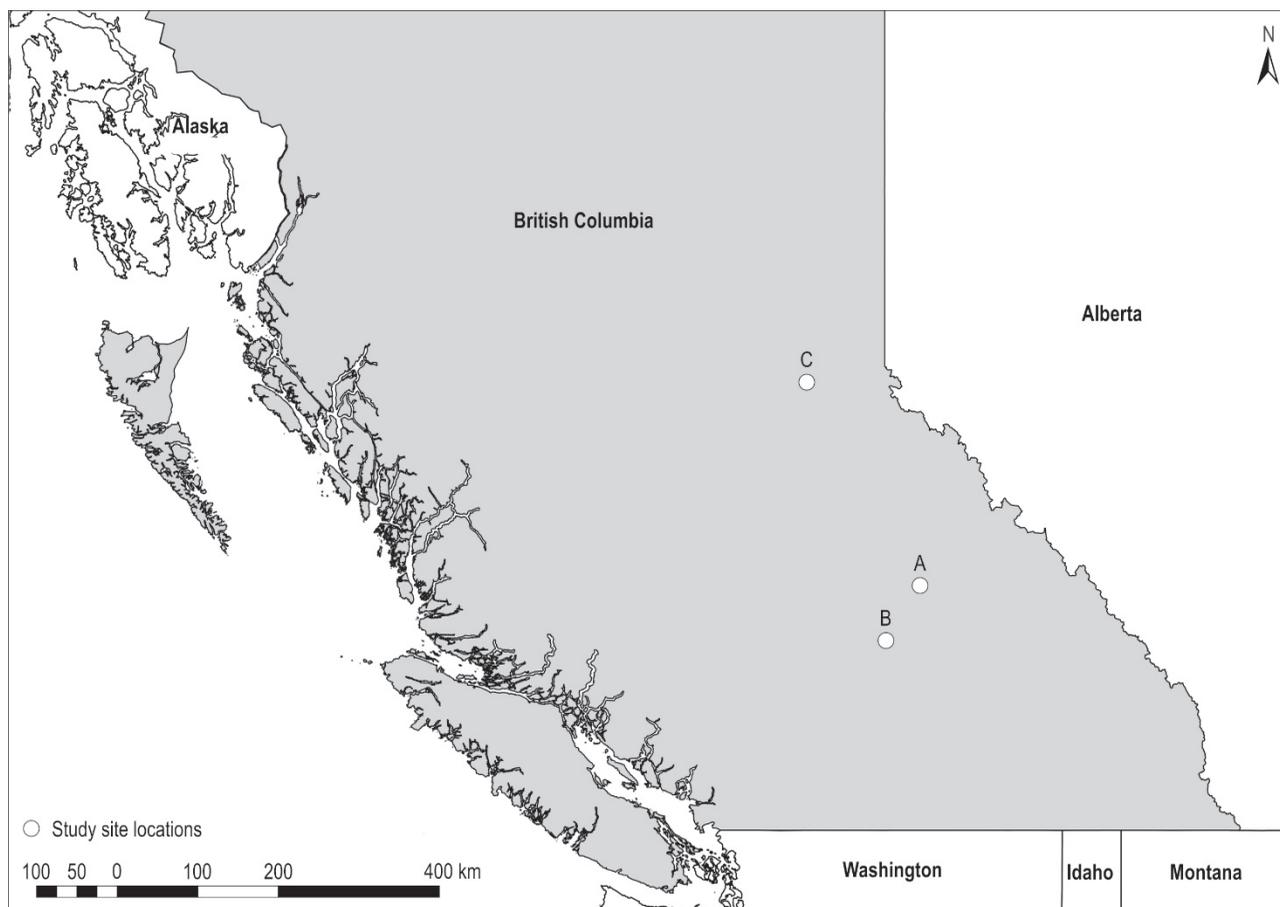


Fig. 1 Location of study sites

slip, especially in terms of site operative conditions and machine specifications (Sessions et al. 2017).

Forestry machines operating in steep terrain should be able to stop in full control at all times without reliance on the cable. Lots of winch-assist systems utilize alert devices which sound an alarm in the operator's cab if the anchor moves. These devices are generally based on systems able to detect the anchor movements or the sudden drop of the rope tensile force, usually occurring when anchors have moved, or wire rope/connectors have failed (Amishev 2016). However, there are currently no high-resolution on-board information systems installed to provide detailed information about the actual tensile force on the cable/s. Holzleitner et al. (2018) developed a scientific approach with a robust workflow for in-depth monitoring and analysis of cable tensile force for harvesters and forwarders equipped with integrated winch-assist systems. The Authors tested the methodology and presented results from a short-term study of tensile forces of harvester and forwarder operations in Central Europe. The forwarder analyzed by Holzleitner et al. (2018), following the classification system reported in Brunberg (2004), was a medium-size machine (load capacity 12 ton). There is no evidence of research studies reporting tensile force monitoring on large forwarders (load capacity >14 ton).

The main objective of this study was to analyze the performance of large winch-assist forwarders equipped with integrated winches operating on ordinary harvesting sites in British Columbia, focusing on the tensile force monitoring of the support cables. A better understanding of factors affecting cable tensile force during harvesting operations was another objective of the study.

2. Materials and methods

2.1 Study sites and machine description

The study was conducted in three different harvesting blocks located in the interior of British Columbia (Fig. 1), between Clearwater, Kamloops, and Prince George. All three harvested study sites were comprised of old-growth forests dominated by hybrid spruce (*Picea glauca* var. *albertiana* (S.Br.) Sarg.), subalpine fir (*Abies lasiocarpa* (Hook.) Nutt.) and lodgepole pine (*Pinus contorta* Douglas ex Loudon), with varying stand characteristics (Table 1). The study took place in ordinary harvesting operations where stands were clearcut using a combination of fully mechanized winch-assist and conventional ground-based operations. The winch-assist operations were limited to the

Table 1 Timber cruise stand and stem volume

Parameter	Site A	Site B	Site C
Total harvested area, ha	50.2	17.1	116.2
Winch-assist harvested area, ha	29.0	9.7	81.0
Wood volume, m ³ ha ⁻¹	364	409	374
Average stem net merchantable volume, m ³	0.63	0.45	1.10
Average DBH, cm	32.9	27.2	41.3
Stand density, stems ha ⁻¹	577.0	909.3	339.7
Species composition by volume, %	–	–	–
Douglas-fir <i>Pseudotsuga menziesii</i> (Mirb.) Franco	–	7	–
Hybrid spruce <i>Picea glauca</i> var. <i>albertiana</i> (S.Br.) Sarg.	63	10	68
Lodgepole pine <i>Pinus contorta</i> Douglas ex Loudon	–	50	–
Subalpine fir <i>Abies lasiocarpa</i> (Hook.) Nutt.	37	33	31
Western hemlock <i>Tsuga heterophylla</i> (Raf.) Sarg.	–	–	1

steepest sections of the blocks, interesting between 57% and 70% of the areas.

Three John Deere 1910E eight wheels winch-assist forwarders were monitored. The 21.8 ton forwarders have a maximum payload of 19.0 ton and are powered by a 186 kW engine. The cabs are self-leveling and rotate automatically following the crane movements. A Haas synchro-winch was mounted on the rear frame of each forwarder. The capstan style winch has a drive drum which provides tensile force to the cable, separately from the storage drum. The winch provides a consistent pulling power synchronized with the forwarder wheel rotation. The operator can adjust the tensile force to ten different settings ranging from 0 to 90 kN. Forwarder maximum speed is 6 km h⁻¹ when winch-assist is active. The store drum holds 400 m of cable with a diameter of 14 mm and a minimum breaking load of 211 kN. The Haas winch system, including the cable, weighs 1.9 ton.

2.2 Data collection

The data collection was based on the cable tensile force monitoring, synchronized with the time and motion study and with the collection of the machine positions on known corridor profiles. The approach pro-

posed by Holzleitner et al. (2018) for monitoring tensile force in winch-assist operations was adapted and integrated with the profile field survey and the load volume estimation. The study was conducted in the fall of 2017 in conditions of snow and freezing temperatures.

The cable tensile force was measured by a Cable-Bull® SR22/800 XR sensor (manufactured by the Honigmann Industrielle Elektronik GmbH) positioned close to the anchor. The rated load capacity was 200 kN and the resolution was 0.0127 kN. The recording frequency could be set to four different modes 100, 200, 1000, and 2000 Hz. The survey frequency was set to 100 Hz. A diameter compensator enabled pre-calibrating the sensor to measure cable ranging from 14 to 22 mm in diameter. An analogic-digital converter unit was used to connect the sensor to a laptop where the data was recorded through the HCC-Easy software (version 6.02.23). The connections of the sensor and the converter were reinforced and isolated to protect the system from the elements and hard contact with the ground.

Two video cameras were installed in the forwarder cabs. One camera recorded the work cycles and motion elements and the second camera recorded the winch settings chosen by the operators. Both cameras were set to acquire videos at 720 ppm with 30 frames s⁻¹. A GNSS sensor, integrated and synchronized with an Inertial Measurement Unit (IMU) – composed by an accelerometer and gyroscope – on a single board microcontroller Arduino®, was installed in the forwarder cabs. This sensor measured the forwarder's speed, position, and inclination at a registration frequency set to 5 Hz; as the cabs were self-leveling no machine inclination data was collected. High-quality photos were taken of each load to estimate forwarder load volume. Both back and lateral photos were taken orthogonally to the machine, reducing to the minimum the distortions, when the cable was on the ground with no tensile force. Forwarding corridor terrain profiles were surveyed by measuring slope and distance using a Truepulse®200 rangefinder at each significant change in ground slope. Anchor positions and survey points were marked using the AvenzaMap® app. Anchor trees species, diameters, and heights were noted.

2.3 Data analysis

The tensile force analysis was completed by combining recorded tensile forces with video analysis, load volumes, and corridor profile data. The clock time on the laptop recording the tensile force data was synchronized before each survey session using a web connection. The R software (version 3.2.4) was then

used to synchronize the two cameras and analyze the whole set of data.

The Analysis of Variance (ANOVA) was used for analyzing the differences between different work elements in both mean tensile forces and in average peak tensile forces, utilising the forwarder cycles as the observational unit. If the normality of the data distribution and the homogeneity of the variance assumptions were violated, non-parametric tests were used to perform the analysis. The relationships between the tensile force and potential influencing factors were tested through simple and multiple linear regression analysis at a significance level of 0.05.

The in-cab videos were analyzed identifying the forwarder travel direction – uphill, downhill or stationary – and the different work cycles, work elements, and delays following procedures defined in the Basic Time Concepts (Björheden 1991). If two elements overlapped, the activity with the higher priority (1: highest; 3: lowest) was recorded following the method described by Fernandez-Lacruz et al. (2013) and Erber et al. (2016), adapted to the present time study. The work elements were:

- ⇒ Travel empty: time spent moving (empty) to the loading site; starts when the forwarder wheels begin to rotate and ends when the boom begins to swing (priority 2)
- ⇒ Loading: time spent loading logs in one trip; starts when the boom begins to swing and finishes when the boom stops swinging (priority 1)
- ⇒ Driving – loading: time spent moving between the different loading spots; starts when the forwarder wheels begin to rotate and ends when the boom begins to swing (priority 2)
- ⇒ Travel loaded: time the loaded machine spends moving to the landing; starts when wheels begin to rotate and ends when the boom begins its swing (priority 2)
- ⇒ Unloading: time spent unloading logs at the landing; starts when the boom begins to swing and finishes when the boom stops its swing (priority 1)
- ⇒ Driving – unloading: time spent moving between different sort piles at the unloading site; starts when the forwarder wheels begin to rotate and ends when the boom begins to swing (priority 2)
- ⇒ Winch control: time the operator spent changing the force settings on the winch control panel (priority 3)
- ⇒ Delay: includes all delays less than 15 minutes.

Table 2 Corridors features

Corridor	Site	Cycles	Operator	Forwarding direction	Slope, %			Horizontal length, m	Inclined length m
					Mean	SD	Max		
1	A	6	A–B	Down	25.4	8.1	39.1	210.4	218.6
2	B	3	C	Up	36.6	19.0	75.8	238.6	261.3
3	C	2	D	Down	44.2	12.3	68.2	201.4	224.9
4	C	2	D	Down	40.6	12.2	58.0	208.7	232.3
5	C	4	D	Up	32.6	8.8	42.3	89.4	95.8
6	C	4	D	Down	36.1	19.6	55.0	204.4	225.7
7	C	5	D	Down	45.3	10.9	58.3	203.4	226.6
8	C	2	D	Down	37.1	19.7	66.4	200.0	220.5

Forwarder load photos were uploaded into CAD software, following a perspective correction through Adobe Photoshop® to reduce eventual minimal distortions. Field measurements of forwarder bunk dimensions were used for scaling the photos. Load volume was calculated from log diameters and average log lengths, measured directly in the CAD software, assuming the logs as pure cylinders. Profile data were analyzed through the R software to define terrain slope at any distance from the landings. The tensile force data was combined with the video analysis, the GNSS-IMU data, and the corridor terrain profile data to obtain a data set showing: the cable tensile force, clock time, metric coordinates, distance from the mid-road (from which calculate the distance from the anchor), ground slope, machine speed, cycle number, and work element. The videos recording the operator settings were analyzed only for one of the operators working in two different corridors.

3. Results and discussion

A total of 14.7 hours of forwarding operations were monitored, recording more than 5.3 million rows of tensile force data. The study included 28 forwarder loads driven by four different operators on eight different corridors. All operators were less than 40 years of age and had at least two years' experience in winch-assist operations. The average slopes of the corridors ranged between 25 and 45%, but in six of them, the maximum slopes exceeded 55%. The corridor lengths varied between 90 and 260 m. Downhill forwarding direction was the most commonly observed method (21 on 28 cycles). According to the operators, this was

because of lower fuel consumption, better traction, and overall improved efficiency compared to uphill forwarding. For this reason, most of the time cut blocks were planned with landings at the bottom and a road/trail to the top for access to an anchor. Details on corridors features are shown in Table 2.

The average work cycle was 31.6 minutes long, with the loading element accounting for more than one-third of the total time (Fig. 2). Loading and unloading accounted for 52.2% of the total recorded time, while traveling was 44.8%. Forwarders operated for 72.0% of the time on trails and 28.0% of the time on forest roads.

The forwarder travel distances were measured as the horizontal distances from the forest road centre line in proximity to the trail, assumed as the reference starting point. The distance traveled on the trails, measured as the farthest loading point of the cycle, ranged from 42.5 m to 203.1 m, with an average of 149.1 m (SD 46.4 m). Forwarder distances traveled on the roads, measured as the farthest unloading point of the cycle, ranged from 14.0 m to 203.9 m, with an average of 67.8 m (SD 52.9 m).

The total wood volume forwarded during the study was 523 m³. Volume forwarded by corridor showed a wide range, from 28 to 110 m³, mainly because of different number of monitored cycles per corridor. The average wood volume extracted for each cycle was 18.7 m³ cycle⁻¹ (SD 4.2 m³ cycle⁻¹) ranging between 10.9 to 24.1 m³ cycle⁻¹. A total of 1054 logs were counted and measured by photo analysis. The average log size was 0.50 m³, ranging from 0.13 to 1.60 m³. Table 3 shows details of forwarder travel distances and loads aggregated per corridor.

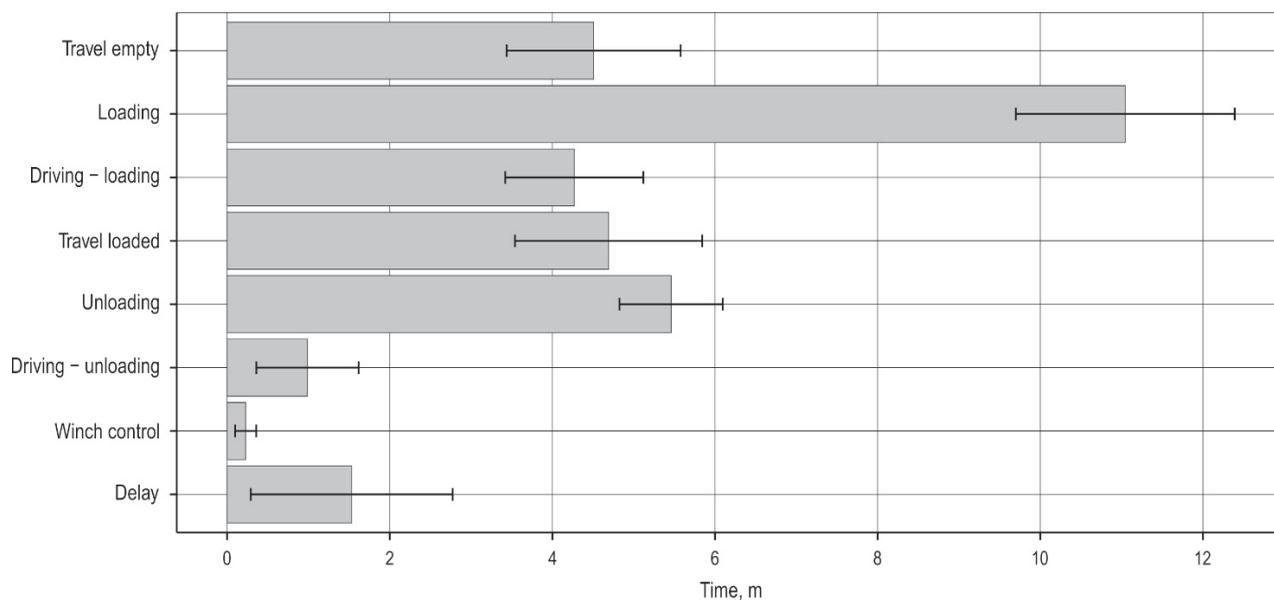


Fig. 2 Average duration of each work element. The error bars report the 95% confidence interval

Table 3 Average forwarding distances and load features aggregated per corridors. Values between the brackets report the standard deviation

Corridor	Cycles	Mean trail distance (SD) m	Mean road distance (SD) m	Total wood volume m ³	Mean load volume (SD) m ³	Mean log size (SD) m ³
1	6	141.8 (52.8)	60.8 (26.5)	95.9	16.0 (5.0)	0.34 (0.26)
2	3	136.5 (49.4)	75.1 (21.7)	50.6	16.9 (4.8)	0.22 (0.06)
3	2	158.7 (37.3)	24.2 (4.4)	32.7	16.4 (1.9)	0.55 (0.11)
4	2	149.3 (36.6)	37.0 (9.3)	28.7	14.4 (4.2)	0.50 (0.10)
5	4	80.2 (9.6)	47.2 (10.5)	84.4	21.1 (3.4)	0.74 (0.22)
6	4	168.8 (34.6)	138.6 (81.2)	75.9	19.0 (2.5)	0.66 (0.13)
7	5	194.7 (3.2)	64.3 (75.4)	109.8	22.0 (2.6)	1.02 (0.45)
8	2	164.7 (19.0)	60.9 (12.5)	45.0	22.5 (2.0)	0.95 (0.54)

3.1 Working load of the cable and tensile force variability

The tensile force was less than 30% of the minimum breaking load of the cable in almost all the cycles. In only four cycles, the peak tensile forces exceed one-third of the minimum breaking load for a total of just 7.3 seconds. The maximum working load (expression of the tensile force as percentage of the minimum breaking load of the cable) recorded in the study was 40.1% and it happened while a forwarder was traveling empty. The distribution of working load of the cable shows a characteristic bimodal shape (Fig. 3), similar to the working load distribution presented by Holzleitner et al. (2018). Low working loads occurred mainly during the unloading element at the landing,

where tensile force ranged from 8 to 15 kN. Higher working loads were measured during the work elements operating on steep trails, and in particular during the loading (Fig. 4), which was also the longest element in the average cycle.

For most of the work elements, cable tensile force ranged from 15 to 55 kN, with peak tensile forces occasionally exceeding 70 kN (Fig. 5). Minimum tensile forces, less than 10 kN, were recorded during unloading and traveling on the road. The winch control element occurred most frequently while the forwarders were operating in the loading area, setting the winch considering the trail conditions. Thus, tensile forces recorded during this element assumed values similar to loading and driving on the trails.

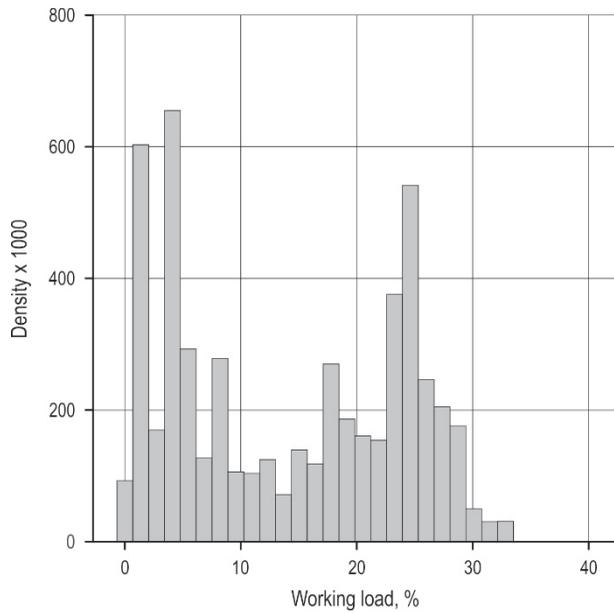


Fig. 3 Working load of the cable for the whole dataset

The cable tensile force of a forwarder completing one cycle forwarding logs downhill is shown in Fig. 6. The first five minutes of data show tensile force peaking and then receding to about 5 kN. This was because the forwarder had to return to the road and lower the tensile force as the cable was wedged in a stump. The


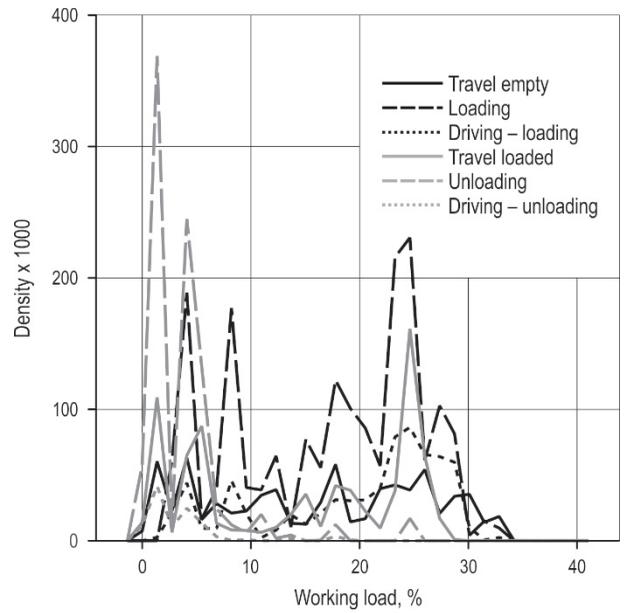


Fig. 4 Working load of the cable divided for the different work elements. Winch control and delay are excluded for better clarity of the graph

sequence of spikes between the loading and driving on the trail is due to the non-perfect synchronization between the machine movements and the winch. Tensile force decreased by approximately 10 kN when the

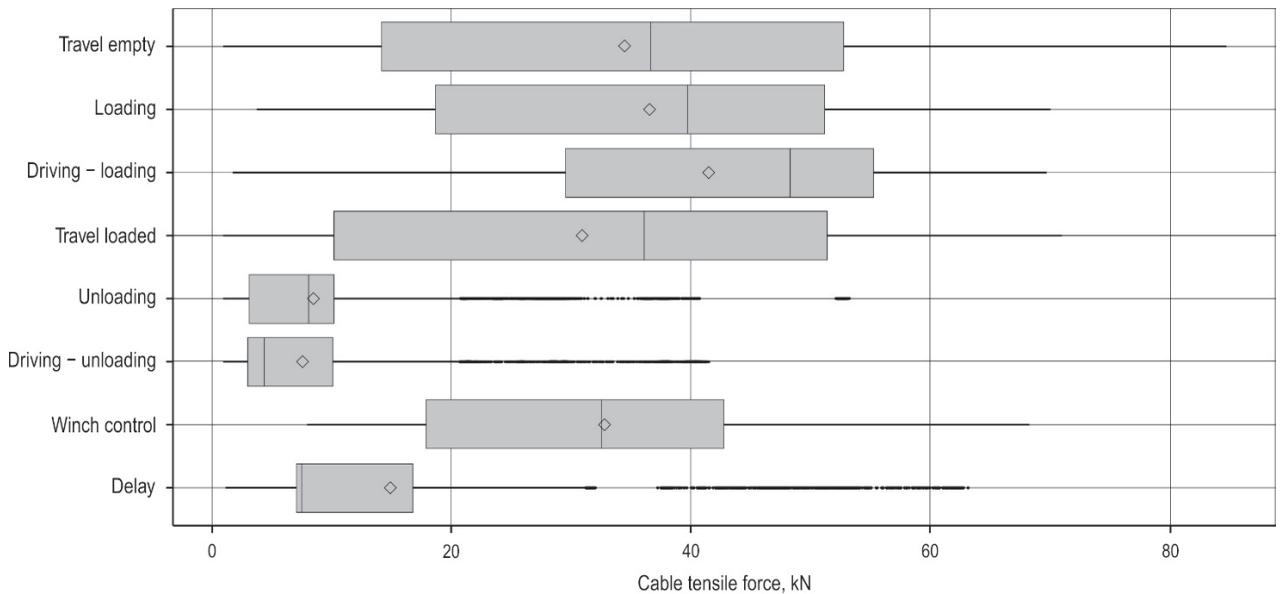

The grey boxes include the data between the 25th and 75th percentile
 The whiskers extend to the most extreme data point which is no more than 1.5 times the length of the box away from the box
 The black point represents out-layers (considering the »1.5 rule«)
 The vertical black line in the grey boxes represents the Median
 The rhombus represents the Mean

Fig. 5 Rope tensile force distribution for each work element

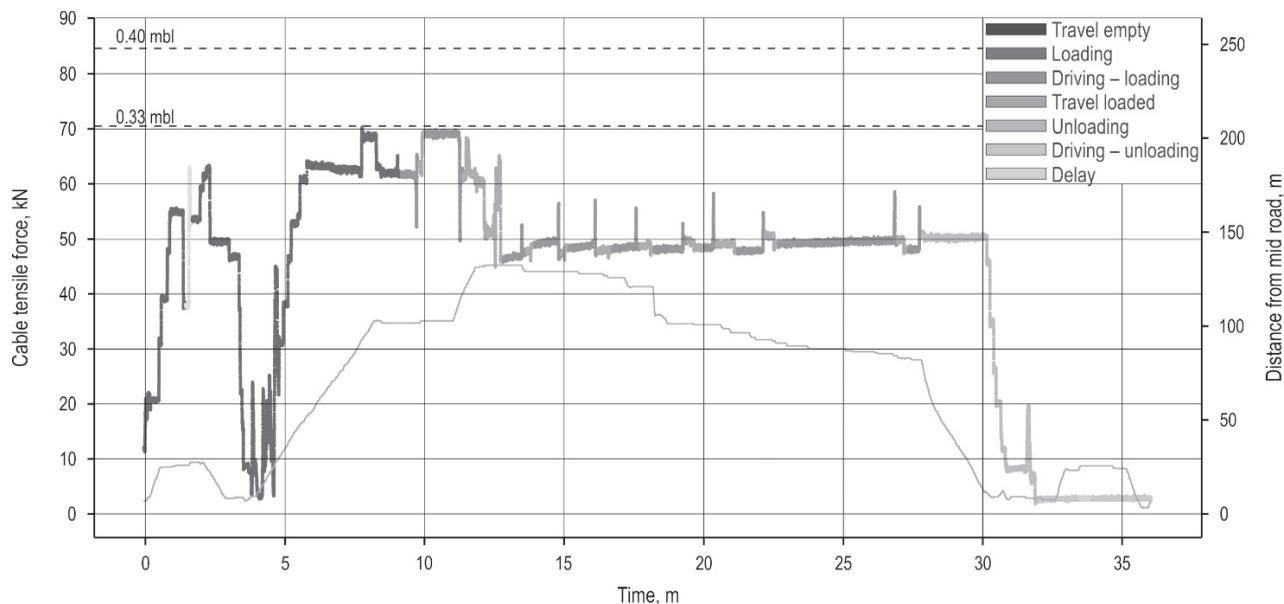


Fig. 6 Rope tensile force plotted over time for a whole cycle. Continuous line shows the distance of the forwarder from the mid road. Two dashed lines represent the safe working load of the cable (33 and 40% of the minimum breaking load)

forwarder began moving uphill after being stationary. Again, when the machine started moving downhill after a stationary element, there were positive spikes due to the machine moving in the opposite direction of the winch force.

3.2 Mean and peak tensile forces

The highest mean tensile forces were recorded for loading and driving between different loading spots (driving – loading), considering both the whole set of data and the separate subsamples of downhill oriented cycles (logs forwarded downhill to the landing) and uphill oriented cycles (logs forwarded uphill to the landing). Lower and similar tensile forces were recorded for travel empty, travel loaded, winch control and delay. The minimum values were recorded for the unloading elements (unloading and driving – unloading) at the landing.

Regarding the average peak tensile forces, which represent one of the main concerns in tensile force analysis, the highest and similar values were recorded again during the work elements operating on steep trail and in particular during loading and travel empty. Travel empty also represented the element during which the absolute highest peak tensile force of 84.6 kN was recorded. However, analyzing separately the subsample of uphill oriented cycles, the highest average peak tensile forces were recorded for the travel loaded element. These considerations suggested the absence of correlation between the total machine weight and the tensile force, while the travel direction

prevailed. Table 4 shows the results of the Kruskal-Wallis and Mann-Whitney-Wilcoxon non-parametric tests, which were applied instead of the ANOVA because of the violation of the normality of data distribution and the homogeneity of variance.

The frequency, with which a work element recorded the highest tensile force value in the cycle, changed

Table 4 Tensile force data aggregated per work element

Work element	Mean tensile force, kN	Average peak tensile force, kN	Max peak tensile force kN
Travel empty	31.6 (14.85) ^{ab}	48.0 (17.4) ^a	84.6
Loading	38.5 (16.6) ^b	50.6 (14.6) ^a	69.9
Driving – loading	37.9 (16.4) ^b	46.7 (17.1) ^{ab}	69.6
Travel loaded	27.3 (10.9) ^a	46.2 (15.7) ^a	70.8
Unloading	8.1 (7.0) ^c	12.6 (13.4) ^c	53.1
Driving – unloading	6.8 (4.8) ^c	10.2 (10.2) ^c	41.4
Winch control	27.6 (14.4) ^{ab}	37.5 (21.2) ^b	68.2
Delay	25.0 (15.6) ^a	35.8 (16.3) ^b	63.0

»Mean tensile force« and »Average peak tensile force« represent the data aggregate per work element calculated as the mean of different cycles
 The »Max peak tensile force« represents the maximum tensile force recorded in the whole dataset for any work element (just one value for any work element)
 The standard deviation is reported between the brackets. Different letters close to the brackets represent statistical differences between the work elements

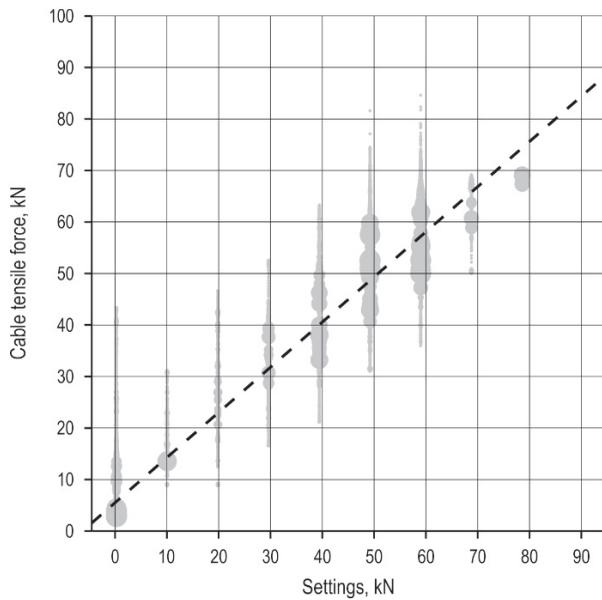


Fig. 7 Tensile force and settings relationships. Different sizes represent the point density. Dashed line represents the linear regression

considering the forwarding direction. For uphill oriented forwarding operations, the maximum tensile force was recorded during the travel loaded element in 71.4% of the cycles. Instead, for downhill oriented operations, which represent the majority of the analyzed cycles, the elements which recorded the main frequency in reaching the maximum tensile force was travel empty (47.6% of the cycles), followed by loading (28.6%). Thus, in both the configurations, the maximum tensile forces were recorded while the forwarders were traveling uphill, during travel empty for downhill oriented operations, and during travel loaded for the uphill oriented ones. This suggested again that the total machine weight (and thus also the wood volume transported during the travel loaded element) did not influence the peak tensile force, while the punctual travel direction did. Indeed, considering the cycle as the observational unit, no statistically significant relationships were found between the maximum tensile forces and the load volume, nor for the forwarding direction (uphill or downhill orientation), and the maximum trail slope. Only the average trail slope was significant ($F=22.1, p<0.001, R^2=0.460$).

3.3 Tensile force influencing factor analysis

When the forwarders were operating on the trails, the slope, travel direction, and distance from the anchors (derived by the distance from the mid-road) resulted as the main significant variables influencing the tensile force and able to explain 49% of the data variability ($F=929371.9, p<0.001, \text{Adjusted } R^2=0.493$).

Table 5 Correlation coefficients

Coefficient	Estimate of coefficient	Standard error of estimate	t-value	p-value
Intercept	6.172	0.0270	228.905	<0.001
Slope	0.936	0.0001	1864.653	<0.001
Travel direction Stationary	-1.200	0.0147	-81.805	<0.001
Travel direction Uphill	3.644	0.0181	201.255	<0.001
Anchor distance	-0.050	0.0000	-411.133	<0.001

Estimates, coefficients, standard errors, and significant levels are reported in Table 5. While increasing slope is easily connected to the tensile force increase, the increase in the tensile force during moving uphill could be associated with the necessity to contrast the slipping of the wheels. The reduction in the tensile force at an increased distance from the anchor could be mainly connected to losses due to the friction of the cable on the ground and stems, which exceed the effect of tensile force increasing due to an increased difference in altitude (rope weight effect).

In the subsample of data, where setting information have been analyzed, settings chosen by the operator were able to explain alone 94% of the tensile force variability measured at the anchor ($F=26889960.5, p<0.001, R^2=0.944$), representing the main factor influencing the cable tensile forces. The differences between the recorded tensile forces and the operator settings were normally less than plus or minus 15 kN. Fig. 8 shows the prevalence of an extra tensile force ranging from 2 to 6 kN when the forwarders were operating at the forest road. Considering that most of the cycles were downhill oriented, the forwarders at the forest road were located at about 50 m less in altitude and about 200 m of distance. The weight per unit of length of the cable, multiplied for the difference in altitude and reduced by the partial force losses for friction on the ground (limited in case of very low tensile forces), caused this almost constant extra tensile force during unloading at the forest road. Limiting the analysis to the subsample of data related to forwarding operations on steep trails (thus excluding operations occurred when the machine was located on the forest road), the relationship between the tensile force and the operator settings (Fig. 7) decreases in strength but still maintains high determination ($F=4131298.5, p<0.001, R^2=0.774$). The relationship increased when only the data related to active machine movements

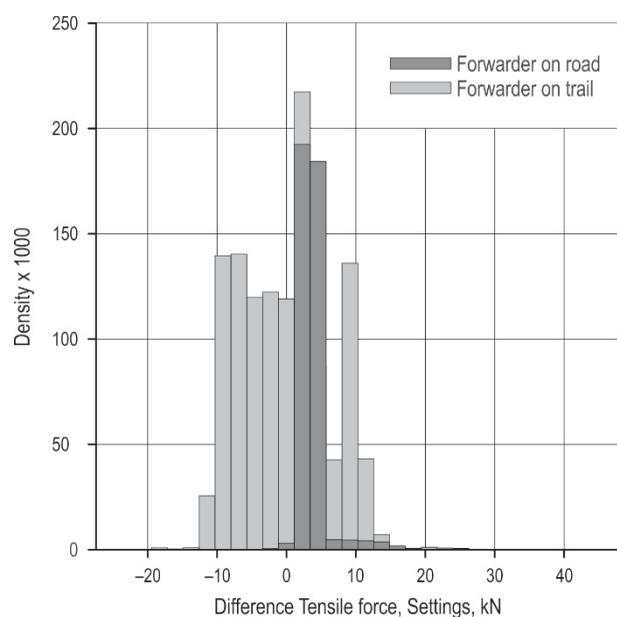


Fig. 8 Differences between tensile force measured at the anchor and tensile force set by the operator in the winch control panel

uphill or downhill ($F=3727998.5$, $p<0.001$, $R^2=0.841$) were considered.

The analysis of the main factors influencing the residuals of the tensile force-setting regression did not show a satisfying result because of the limited data available (one-day recording on two corridors). Slope, travel direction, and distance from the anchor were able to explain just 5% of the residuals variability ($F=15560.4$, $p<0.001$, Adjusted $R^2=0.049$). However, the same limited dataset was able to explain only 15% of the tensile force variability ($F=54052.9$, $p<0.001$, Adjusted $R^2=0.152$), compared to the 49% of the whole dataset on the trail. Thus, the analysis of operator settings, considered as the main factor influencing the cable tensile force in winch-assist forwarding, should be expanded for identifying the main influencing variables.

4. Conclusion

The study found that in 24 of 28 (86%) forwarder cycles, cable tensile forces were less than one-third of the minimum breaking load of the cables. This limit was exceeded for only 7.3 seconds during the 14.7 total operating hours monitored in the study. A series of short duration spikes in cable tensile force was observed when the forwarder was loading and then moved. This was attributed to a time lag between the time when the wheels started moving and the response of the winch, indicating that synchronization

between the winch and the wheel movement was not perfectly matched.

Cable tensile force analysis showed an expected pattern of minimum tensile force while the forwarders were traveling on the road or unloading and high tensile forces when operating on steep trails, loading or traveling. Further analysis found that maximum cycle tensile forces were recorded most frequently during traveling uphill, empty or loaded, independently of the load, forwarding direction orientation, or maximum corridor slope. Only the average corridor slope was significant and able to explain 46% of the peak tensile force variability. Analyzing the set of data related to the forwarder operations on steep trail, slope, travel direction, and distance of the machine from the anchor resulted statistically significant and able to account for 49% of tensile force variability. However, in the same conditions, the operator settings account for 77% of tensile force variability, representing the main factor in determining the actual tensile forces.

Cable tensile force is an important factor in assessing long-term cable performance and developing safety guidelines for winch-assist harvesting machines. This study found that the tensile force settings chosen by the forwarder operators account for most of the tensile force variability, suggesting the need for considering the human factor in the safety procedures. Deeper investigation should also be focused on the analysis of the relevance of the operator experiences in winch-assist operations and its relationship with the settings chosen. The present study involved four different operators; however, most of the cycles were monitored on a single operator (operator D) and all the operators had similar age and experience. Again, considering the fact that cable tensile forces never reached critical values, further research should consider the development of protocols to analyze localized cable damages and natural anchor stability, which could represent the worst safety limit in winch-assist operation based on integrated-winch machines.

5. References

- Alam, M., Acuna, M., Brown, M., 2013: Self-levelling feller-buncher productivity based on LiDAR-derived slope. *Croatian Journal of Forest Engineering* 34(2): 273–281.
- Amishev, D., 2016: Winch-assist technologies available to Western Canada. Technical report No. 37, FPIInnovations, Vancouver, British Columbia (Canada).
- Amishev, D., Evanson, T., Raymond, K., 2009: Felling and bunching on steep terrain – A review of the literature. *Harvesting Technical Note HTN01-07*, Future Forests Research Limited, Rotorua, 10 p.

- B.C. Reg. 296/97: Workers compensation act. Occupational health and safety regulation. Part 26 – Forestry operations and similar activities. Equipment operations – 26.16 Slope limitations.
- Berkett, H., 2012: An examination of the current slope gradients being experienced by ground-based forest machines in New Zealand plantation forests. M.Sc. Thesis, University of Canterbury, Christchurch, New Zealand, 75 p.
- Björheden, R., 1991: Basic time concepts for international comparisons of time study reports. *Journal of Forest Engineering* 2(2): 33–39.
- Brunberg, T., 2004: Underlag till produktionsnormer för skotare [Productivity-norm data for forwarders]. Skogforsk, Uppsala, Sweden. Redogörelse 2004(3): 12 p.
- Cavalli, R., 2012: Prospects of research on cable logging in forest engineering community. *Croatian Journal of Forest Engineering* 33(2): 339–356.
- Cavalli, R., 2015: Forest Operations in Steep Terrain. Proceedings of the Conference CROJFE 2015 Forest Engineering – Current situation and future challenges, March 18–20, Zagreb, Croatia.
- Cavalli, R., Amishev D., 2017: A case study: ground yarding in mountainous terrain. Proceedings of the 27th Club of Bologna Member's Meeting – Session 3 KNR 3.2, November 12–13, Hannover, Germany.
- Dyson, P., Boswell, B., 2016: Winch-assisted feller-buncher equipped with a continuous-rotation disc saw: short-term productivity assessment. Technical report No. 46, FPInnovations, Vancouver, British Columbia (Canada).
- Erber, G., Holzleitner, F., Kastner, M., Stampfer, K., 2016: Effect of multi-tree handling and tree-size on harvester performance in small-diameter hardwood thinnings. *Silva Fennica* 50(1): Article id 1428, 17 p.
- Fernandez-Lacruz, R., Di Fulvio, F., Bergström, D., 2013: Productivity and profitability of harvesting power line corridors for bioenergy. *Silva Fennica* 47(1): Article id 904, 23 p.
- Grigolato, S., Panizza, S., Pellegrini, M., Ackerman, P., Cavalli, R., 2016: Light-lift helicopter logging operations in the Italian Alps: a preliminary study based on GNSS and a video camera system. *Forest Science and Technology* 12(2): 88–97.
- Heinimann, H.R., 2004: Harvesting: forest operations under mountainous conditions. In: Jeffery, B. (Ed.), *Encyclopedia of Forest Sciences*. Elsevier, Oxford, 279–285 p.
- Hert, R., 2016: Risk management issues for mechanized harvesting. Steep slope Conference, Richmond, British Columbia (Canada).
- Holzleitner, F., Kastner, M., Stampfer, K., Holler, N., Kanzian, C., 2018: Monitoring cable tensile forces of winch-assist harvester and forwarder operations in steep terrain. *Forests* 9(2): 1–13.
- Lyons, K.C., McNeel, J., 2004: Partial retention and helicopter turn volume. *Forest Products Journal* 54(1): 58–61.
- McKenzie, D., Richardson, B., 1978: Feasibility study of self-contained tether cable system for operating on slopes of 20–75%. *Journal of Terramechanics* 15(3): 113–127.
- Marchi, E., Chung, W., Visser, R., Abbas, D., Nordfjell, T., Mederski, P.S., McEvans A., Brink, M., Laschi, A., 2018: Sustainable forest operations (SFO): a new paradigm in a changing world and climate. *Science of the Total Environment* 634: 1385–1397.
- Mologni, O., Grigolato, S., Cavalli, R., 2016: Harvesting systems for steep terrain in the Italian Alps: state of the art and future prospects. *Contemporary Engineering Sciences* 9(25): 1229–1242.
- Sessions, J., Leshchinsky, B., Chung, W., Boston, K., Wimer, J., 2017: Theoretical stability and traction of steep slope tethered feller-bunchers. *Forest Science* 63(2): 192–200.
- Visser, R., Berkett, H., 2015: Effect of terrain steepness on machine slope when harvesting. *International Journal of Forest Engineering* 26(1): 1–9.
- Visser, R., Harrill, H., 2017: Cable yarding in North America and New Zealand: a review of developments and practices. *Croatian Journal of Forest Engineering* 38(2): 209–217.
- Visser, R., Stampfer, K., 2015: Expanding ground-based harvesting onto steep terrain: a review. *Croatian Journal of Forest Engineering* 36(2): 321–331.

Authors' addresses:

Omar Mologni, MSc.
e-mail: omar.mologni@phd.unipd.it
Prof. Raffaele Cavalli, MSc.
e-mail: raffaele.cavalli@unipd.it
Assoc. prof. Stefano Grigolato, PhD *
e-mail: stefano.grigolato@unipd.it
Università degli Studi di Padova
Department of Land Environment
Agriculture and Forestry
Viale dell'Università, 16
35020 Legnaro
ITALY

Dzhamal Amishev, PhD.
e-mail: dzhamal.amishev@fpinnovations.ca
Peter Dyson, BSc.
e-mail: peter.dyson@fpinnovations.ca
FPIinnovations
2665 East Mall Vancouver
British Columbia V6T 1Z4
CANADA

Assist. prof. Andrea Rosario Proto, PhD.
e-mail: andrea.proto@unirc.it
Prof. Giuseppe Zimbalatti, MSc.
e-mail: zimbalatti@unirc.it
Università degli Studi di Reggio Calabria
Località Feo di Vito
89122 Reggio Calabria
ITALY

*Corresponding author

Received: May 02, 2018
Accepted: June 13, 2018